


ENGINES

Type
Configuration
Displacement, cm ³
Bore (mm)
Stroke (mm)
Engine cylinder block material
Cylinderhead material
Compression ratio
Valves, no/cylinder
Camshafts
Engine management system
Ignition sequence
Engine idling speed, rpm
Fuel, rec. octane
Max output, kW (hp)/rpm
Max torque, Nm/rpm

POWER AND TORQUE →

Manual gearbox/final drive
Automatic gearbox/final drive
PERFORMANCE
Gearbox
Acceleration, 0–100 km/h (sec)
Top speed, km/h
Fuel consumption l/100 km (combined)
CO ₂ g/km

T2 (B4204T38)
In-line 4-cyl. turbocharged
Transverse, front wheel drive
1969
82.0
93.2
Aluminium
Aluminium
11.3:1
4
2
Gasoline direct injection
1 - 3 - 4 - 2
850±100
95–98 RON
90 (122)/5000
220/1100-3500

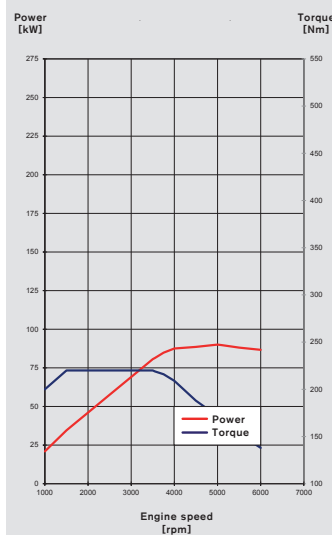


M76 R 6.2	3.833
-	-

Manual
10.4
190
5.6 (5.4*)
127 (123*)

*Restricted offer

T2 (B4154T5)
In-line 4-cyl. turbocharged
Transverse, front wheel drive
1498
82.0
70.9
Aluminium
Aluminium
10.5:1
4
2
Gasoline direct injection
1 - 3 - 4 - 2
850±100
95–98 RON
90 (122)/5000
220/1600-3500

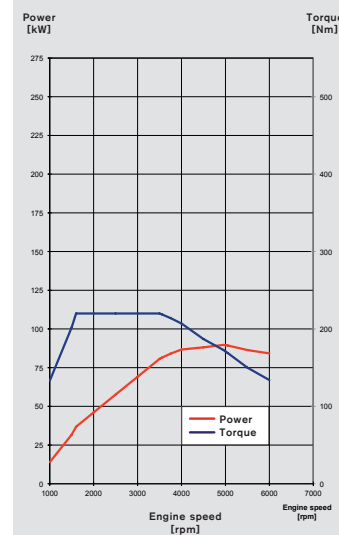

-	-
AW TF-71SC	3.234

Automatic
9.8
190
5.5 (5.4*)
129 (125*)

*Restricted offer

TRANSMISSIONS

- 6-speed manual gearbox
- 6-speed automatic gearbox
- 8-speed automatic gearbox

RATIO	M66H	M76 R6.2	M76 R7.0	AW TF-71SC	AW TG-81SC
First	3.385	3.583	3.583	4.044	5.250
Second	1.952	2.048	2.048	2.371	3.029
Third	1.267	1.310	1.290	1.556	1.950
Fourth	0.868	0.919	0.886	1.159	1.457
Fifth	0.652	0.690	0.651	0.852	1.221
Sixth	0.540	0.578	0.511	0.672	1.000
Seventh	-	-	-	-	0.809
Eighth	-	-	-	-	0.673
Reverse	2.692	3.333	3.333	3.193	4.015



ENGINES

Type
Configuration
Displacement, cm ³
Bore (mm)
Stroke (mm)
Engine cylinder block material
Cylinderhead material
Compression ratio
Valves, no/cylinder
Camshafts
Engine management system
Ignition sequence
Engine idling speed, rpm
Fuel, rec. octane
Max output, kW (hp)/rpm
Max torque, Nm/rpm

T3 (B4204T37)
In-line 4-cyl. turbocharged
Transverse, front wheel drive
1969
82.0
93.2
Aluminium
Aluminium
11.3:1
4
2
Gasoline direct injection
1 - 3 - 4 - 2
850±100
95-98 RON
112 (152)/5000
250/1300-4000

T3 (B4154T4)
In-line 4-cyl. turbocharged
Transverse, front wheel drive
1498
82.0
70.9
Aluminium
Aluminium
10.5:1
4
2
Gasoline direct injection
1 - 3 - 4 - 2
850±100
95-98 RON
112 (152)/5000
250/1700-4000

POWER AND TORQUE →

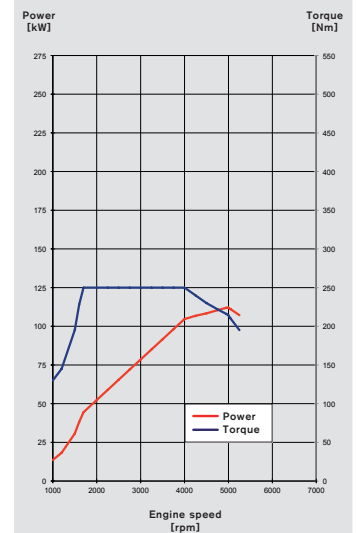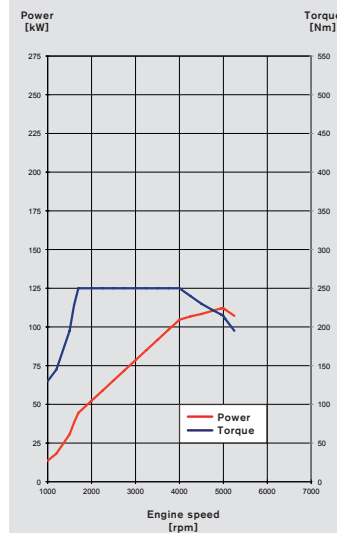

Manual gearbox/final drive
Automatic gearbox/final drive
PERFORMANCE
Gearbox
Acceleration, 0-100 km/h (sec)
Top speed, km/h
Fuel consumption l/100 km (combined)
CO ₂ g/km

M76 R6.2	3.833
-	-
Manual	Automatic
8.9	8.3
210	210
5.6	5.5
127	129

-	3.234
AW TF-71SC	Automatic
	8.3
	210
	5.5
	129

CHASSIS

Suspension	front	MacPherson Strut, Coil Springs, Hydraulic Shock Absorbers, Stabilizer Bar
	rear	Independent Suspension with Coil Springs, Hydraulic Shock Absorbers, Stabilizer Bar
Steering		Electrical Power Assisted Rack and Pinion Steering
Turning circle, (curb to curb)		10.8 m/11.1m/11.7 m (Tire with 205"/225"/235")
Braking system		Antilock Braking System (ABS) with Electronic Brake Distribution (EBD) and Electronic Brake Assistance (EBA)
Braking distance, 100-0 km/h		37 m
Brake disc diameter	front	278 mm/300 mm/320 mm
	rear	280 mm



ENGINES

Type
Configuration
Displacement, cm ³
Bore (mm)
Stroke (mm)
Engine cylinder block material
Cylinderhead material
Compression ratio
Valves, no/cylinder
Camshafts
Engine management system
Ignition sequence
Engine idling speed, rpm
Fuel, rec. octane
Max output, kW (hp)/rpm.
Max torque, Nm/rpm.

T4 (B4204T19)
In-line 4-cyl. turbocharged
Transverse, front wheel drive
1969
82.0
93.2
Aluminium
Aluminium
11.3:1
4
2
Gasoline direct injection
1 - 3 - 4 - 2
850±100
95-98 RON
140 (190)/4700
300/1300-4000

T5 (B4204T11)
In-line 4-cyl. turbocharged
Transverse, front wheel drive
1969
82.0
93.2
Aluminium
Aluminium
10.8:1
4
2
Gasoline direct injection
1 - 3 - 4 - 2
850±100
95-98 RON
180 (245)/5500
350/1500-4800

POWER AND TORQUE →

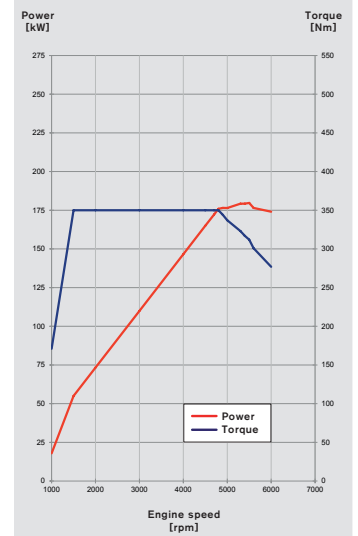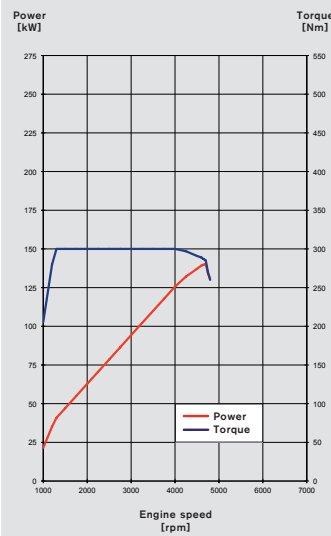

Manual gearbox/final drive
Automatic gearbox/final drive

M76 R6.2	3.833
AW TF-71SC	3.234

-	
AW TG-81SC	2.774

PERFORMANCE

Gearbox
Acceleration, 0-100 km/h (sec)
Top speed, km/h
Fuel consumption l/100 km (combined)
CO ₂ g/km

Manual	Automatic
7.8	6.9
210	210
5.6	5.5
127	128

Automatic
6.3
240
5.9
137

ENGINES




Type
Configuration
Displacement, cm ³
Bore (mm)
Stroke (mm)
Engine cylinder block material
Cylinderhead material
Compression ratio
Valves, no/cylinder
Camshafts
Engine management system
Ignition sequence
Engine idling speed, rpm
Fuel
Max output, kW (hp)/rpm.
Max torque, Nm/rpm.

D2 (D4204T8)
In-line 4-cyl. turbo diesel
Transverse, front wheel drive
1969
82.0
93.2
Aluminium
Aluminium
16.0:1
4
2
Electronically controlled common rail direct injection
1 - 3 - 4 - 2
850±150
Diesel*
88 (120)/3750
280 /1500-2250

D3 (D4204T9)
In-line 4-cyl. turbo diesel
Transverse, front wheel drive
1969
82.0
93.2
Aluminium
Aluminium
16.0:1
4
2
Electronically controlled common rail direct injection
1 - 3 - 4 - 2
825±150
Diesel*
110 (150)/3750
320/1750-3000

D4 (D4204T14)
In-line 4-cyl. twin turbo diesel
Transverse, front wheel drive
1969
82.0
93.2
Aluminium
Aluminium
15.8:1
4
2
Electronically controlled common rail direct injection
1 - 3 - 4 - 2
825±50
Diesel*
140 (190)/4250
400/1750-2500

POWER AND TORQUE →

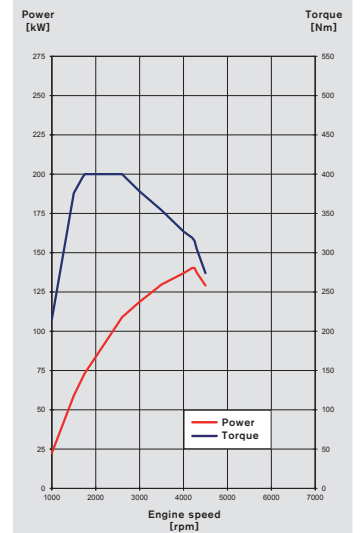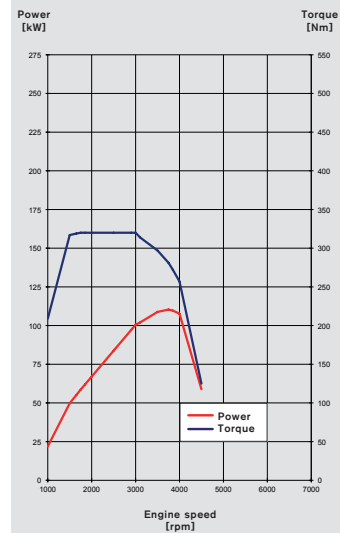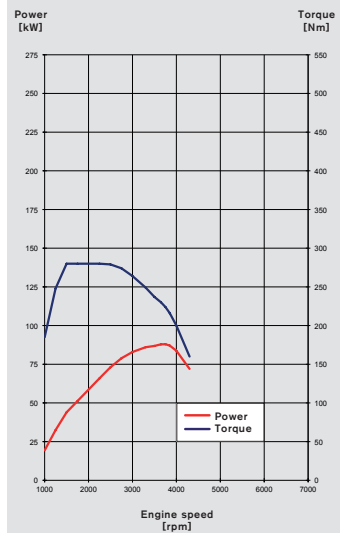

Manual gearbox/final drive	M76 R7.0	3.833
Automatic gearbox/final drive	AW TF-71SC	3.234

Manual	Automatic
10.5	10.5
190	190
3.6 (3.4**)	3.8 (3.7**)
94 (89**)	101 (97**)

Manual	Automatic
8.4	8.4
210	210
3.8 (3.6**)	4.0 (3.9**)
101 (96**)	104 (101**)

Manual	Automatic
7.4	7.2
230	230
3.8 (3.7**)	4.2 (4.0**)
99 (96**)	109 (106**)

PERFORMANCE

Gearbox
Acceleration, 0-100 km/h (sec)
Top speed, km/h
Fuel consumption l/100 km (combined)
CO ₂ g/km

* According to EN590
Maximum biodiesel (FAME) content 7%
** Restricted offer

* According to EN590
Maximum biodiesel (FAME) content 7%
** Restricted offer

* According to EN590
Maximum biodiesel (FAME) content 7%
** Restricted offer

MEASUREMENTS AND VOLUMES

EXTERIOR MEASUREMENTS (CM)

Length	437.0
Width (body width)	178.3
Width (including outer mirrors)	204.1
Height (body height)	142.0
Height (including shark fin antenna)	143.9
Wheelbase	264.7
Track, front, (46 mm/50 mm/52.5 mm)	155.9/155.1/154.6
Track, rear, (46 mm/50 mm/52.5 mm)	154.6/153.8/153.3
Ground clearance, curb (std/sport chassis)	13.3-14.4/12.1-13.3

WEIGHTS/MISCELLANEOUS

Weight, kg (min-max, depending on setup)	1532-1615
Fuel tank, l	62 (40*)
Max. trailer weight, kg	1500
Max roof load, kg	75
Drag coefficient, Cd	0.29-0.32

* Restricted offer

INTERIOR MEASUREMENTS (CM)

Headroom, maximum (front/rear) (H62-1/H61-2 SR)	98.4/93.2
Passenger compartment width at shoulder height (front/rear) (W3-1/W3-2)	139.6/134.9
Leg room (front/rear) (L34/L51-2)	107.3/84.7
Cargo volume, including under floor storage (petrol/diesel) (litres) (V211-2)	324/335
- under floor volume (petrol/diesel) (litres) (V209)	5/16
Cargo length from the second seatback to the tailgate measured at:	
- the height of the floor covering (std/opt) (SAE L202-2)	68.4/78.2
Cargo length from the first seatback to the tailgate measured at:	
- the height of the floor covering (std/opt) (SAE L202-1)	150.8/154.5
Height of luggage compartment (H201) (std opt)	76.0/64.4
Width of luggage compartment between wheelhouses (W201)	96.0
Rear cargo opening width (GCIE W207)	91.6

