
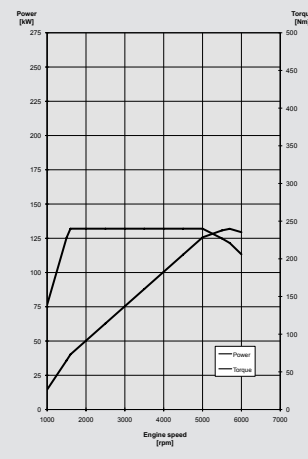
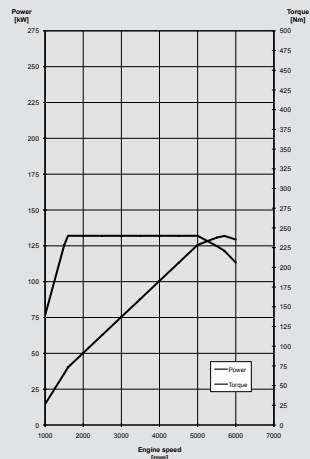


ENGINES	T3 (B4164T3)	T4 (B4164T)	T4F (B4164T2)
Type	In-line 4-cyl.turbo petrol	In-line 4-cyl.turbo petrol	In-line 4-cyl.turbo petrol
Configuration	Transverse, front wheel drive	Transverse, front wheel drive	Transverse, front wheel drive
Displacement, cm ³	1596	1596	1596
Bore (mm)	79.0	79.0	79.0
Stroke (mm)	81.4	81.4	81.4
Engine cylinder block material	Aluminium	Aluminium	Aluminium
Cylinderhead material	Aluminium	Aluminium	Aluminium
Compression ratio	10.0:1	10.0:1	10.0:1
Valves, no/cylinder	4	4	4
Camshafts	2	2	2
Engine management system	Integrated fuel (SFI)/ignition control systems	Integrated fuel (SFI)/ignition control systems	Integrated fuel (SFI)/ignition control systems
Ignition sequence	1 - 3 - 4 - 2	1 - 3 - 4 - 2	1 - 3 - 4 - 2
Engine idling speed, rpm	750	750	750
Fuel, rec. octane	91-98 RON	91-98 RON	E85 & 91-98 RON
Max output, kW (hp)/rpm	110 (150)/5700	132 (180)/5700	132 (180)/5700
Max torque, Nm/rpm	240/1600-4000	240/1600-5000	240/1600-5000

POWER AND TORQUE →

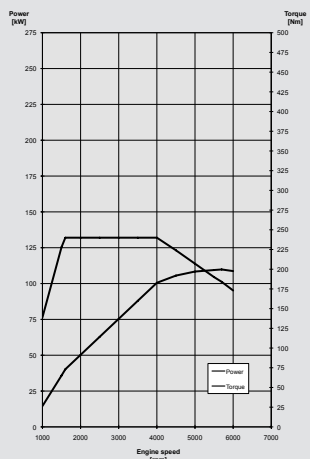

Manual gearbox/final drive	MMT6 W3/3.813 Gear 1-4, 2.773 Gear 5-6+R		MMT6 Z3/3.690 Gear 1-4, 2.682 Gear 5-6+R		MMT6 Z3/3.690 Gear 1-4, 2.682 Gear 5-6+R	
Automatic gearbox/final drive	MPS6-7/3.933 Gear 1-4, 2.682 Gear 5-6+R		MPS6-7/3.933 Gear 1-4, 2.682 Gear 5-6+R		MPS6-7/3.933 Gear 1-4, 2.682 Gear 5-6+R	
PERFORMANCE						
Gearbox	Manual	Automatic	Manual	Automatic	Manual	Automatic
Acceleration, 0-100 km/h (sec)	9.6	10.4	8.5	9.2	8.5	9.2
Top speed, km/h	200	205	220	220	220	220
Fuel consumption l/100 km (Combined)	6.0	7.2	6.6	7.2	7.0	7.2
CO ₂ g/km	139	167	153	167	162	167

TRANSMISSIONS


RATIO	AW TG-81SC	AW TF-80SC	M66D	M66F	MPS6-7	MPS6-4	MMT6(W3)	MMT6(Z3)
First	5.250	4.148	3.385	3.583	3.818	3.583	3.583	3.818
Second	3.029	2.370	1.905	2.050	2.150	1.952	1.952	2.150
Third	1.950	1.556	1.194	1.267	1.407	1.194	1.241	1.423
Fourth	1.457	1.155	0.838	0.838	1.029	0.842	0.868	1.029
Fifth	1.221	0.859	0.652	0.617	1.188	0.943	0.943	1.129
Sixth	1.000	0.686	0.540	0.510	0.971	0.789	0.789	0.943
Seventh	0.809							
Eighth	0.673							
Reverse	4.015	3.394	3.200	2.833	5.284	4.843	5.099	5.434

ENGINES	T5 (B4204T11)	T6 (B4204T9)	T6 AWD (B6304T4)
Type	In-line 4-cyl.turbo petrol	In-line 4-cyl.turbo petrol	In-line 6-cyl.turbo petrol
Configuration	Transverse, front wheel drive	Transverse, front wheel drive	Transverse, all wheel drive
Displacement, cm ³	1969	1969	2953
Bore (mm)	82.0	82.0	82.0
Stroke (mm)	93.2	93.2	93.2
Engine cylinder block material	Aluminium	Aluminium	Aluminium
Cylinderhead material	Aluminium	Aluminium	Aluminium
Compression ratio	10.8:1	10.3:1	9.3:1
Valves, no/cylinder	4	4	4
Camshafts	2	2	2
Engine management system	Integrated fuel (SFI)/ignition control systems	Integrated fuel (SFI)/ignition control systems	Integrated fuel (SFI)/ignition control systems
Ignition sequence	1 - 3 - 4 - 2	1 - 3 - 4 - 2	1 - 5 - 3 - 6 - 2 - 4
Engine idling speed, rpm	875-950	875-950	590
Fuel, rec. octane	91-98 RON	91-98 RON	91-98 RON
Max output, kW (hp)/rpm	180 (245)/5500	225 (306)/5700	224 (304)/5600
Max torque, Nm/rpm	350/1500-4800	400/2100-4500	440/2100-4200

POWER AND TORQUE →

NOT AVAILABLE

NOT AVAILABLE

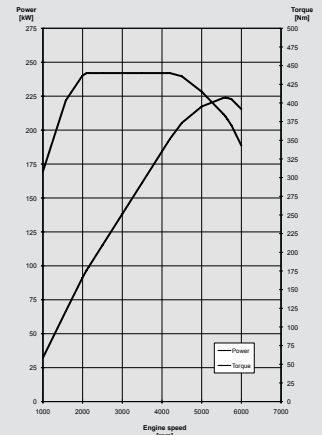

Manual gearbox/final drive	-	-	-
Automatic gearbox/final drive	AW TG-81SC	2.774	AW TG-81SC 2.774
AW TF-80SC	3.329		
PERFORMANCE			
Gearbox	Automatic	Automatic	Automatic
Acceleration, 0-100 km/h (sec)	6.4	6.0	6.0
Top speed, km/h	230	230	250
Fuel consumption l/100 km (Combined)	6.2 (6.1*)	6.7	10.2
CO ₂ g/km	144 (142*)	157	237




* Restricted offer

CHASSIS

Suspension	front	McPherson Strut, Coil Springs, Hydraulic Shock Absorbers, Stabilizer Bar
	rear	Independent Suspension with Coil Springs, Hydraulic Shock Absorbers, Stabilizer Bar
Steering	Power Assisted Rack and Pinion Steering	
Turning circle, curb to curb, 205/235*	11.3 m/11.9	
Braking system	Antilock Braking System (ABS) with Electronic Brake Distribution (EBD) and Electronic Brake Assistance (EBA)	
Braking distance, 100-0 km/h	37 m	
Brake disc diameter	front	300 mm/316 mm/336 mm
	rear	302 mm

ENGINES	D2 (D4162T)	D3 (D5204T7)	D4 AWD (D5244T17)
Type	In-line 4-cyl.turbo diesel	In-line 5-cyl.turbo diesel	In-line 5-cyl.turbo diesel
Configuration	Transverse, front wheel drive	Transverse, front wheel drive	Transverse, all wheel drive
Displacement, cm ³	1560	1984	2400
Bore (mm)	75.0	81.0	81.0
Stroke (mm)	88.3	77.0	93.15
Engine cylinder block material	Aluminium	Aluminium	Aluminium
Cylinderhead material	Aluminium	Aluminium	Aluminium
Compression ratio	16.0:1	16.5:1	16.5:1
Valves, no/cylinder	2	4	4
Camshafts	1	2	2
Engine management system	Electronically controlled common rail direct injection	Electronically controlled common rail direct injection	Electronically controlled common rail direct injection
Ignition sequence	1 - 3 - 4 - 2	1 - 2 - 4 - 5 - 3	1 - 2 - 4 - 5 - 3
Engine idling speed, rpm	790	700	700
Fuel, rec. octane	Cetane Number: Min 48	Cetane Number: Min 48	Cetane Number: Min 48
Max output, kW (hp)/rpm	84 (115)/3600	100 (136)/3500	120 (163)/4000
Max torque, Nm/rpm	270/1750–2500	350/1500–2250	420/1500–2500

POWER AND TORQUE →

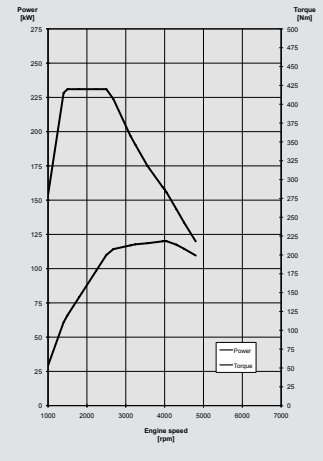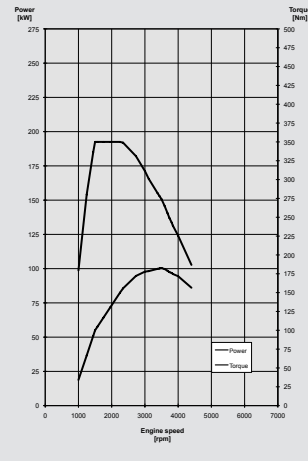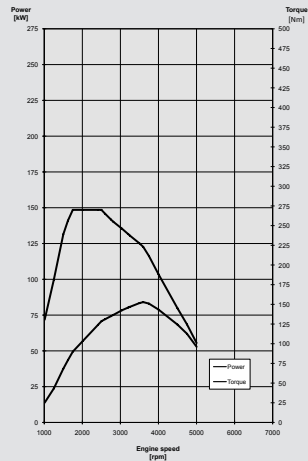


Manual gearbox/final drive	MMT6 W3/4.063 Gear 1–4, 2.955 Gear 5-6+R		M66D F2A	3.770	
Automatic gearbox/final drive	MPS6-4/3.933 Gear 1–4, 2.682 Gear 5-6+R		AW TF-80SC	3.075	AW TF-80SC 3.329
PERFORMANCE					
Gearbox	Manual	Automatic	Manual	Automatic	Automatic
Acceleration, 0–100 km/h (sec)	11.3	12.7	10.4	10.4	10.4
Top speed, km/h	190	185	205	200	215
Fuel consumption l/100 km (Combined)	4.5/4.1*	4.5/4.2*	4.5	4.9	6.4
CO ₂ g/km	119/108*	119/110*	119	129	169

* Restricted offer

ENGINES	D4 (D4204T5)	D4 AWD (D5244T12)
Type	In-line 4-cyl.turbo diesel	In-line 5-cyl.turbo diesel
Configuration	Transverse, front wheel drive	Transverse, all wheel drive
Displacement, cm ³	1969	2400
Bore (mm)	82.0	81.0
Stroke (mm)	93.2	93.2
Engine cylinder block material	Aluminium	Aluminium
Cylinderhead material	Aluminium	Aluminium
Compression ratio	15.8:1	16.5:1
Valves, no/cylinder	4	4
Camshafts	2	2
Engine management system	Electronically controlled common rail direct injection	Electronically controlled common rail direct injection
Ignition sequence	1 - 3 - 4 - 2	1 - 2 - 4 - 5 - 3
Engine idling speed, rpm	825	700
Fuel, rec. octane	Cetane Number: Min 48	Cetane Number: Min 48
Max output, kW (hp)/rpm	133 (181)/4250	133 (181)/4000
Max torque, Nm/rpm	400/1750–2500	420/1500–2500

POWER AND TORQUE →

NOT AVAILABLE


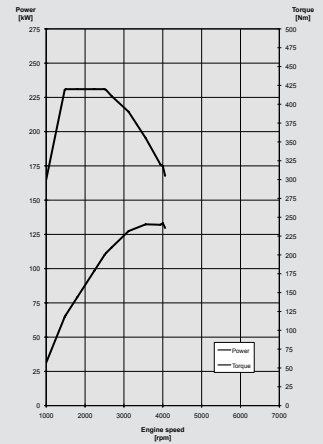


Manual gearbox/final drive	M66F FD	3.770	
Automatic gearbox/final drive	AW TG-81SC	2.666	AW TF-80 SC 3.329
PERFORMANCE			
Gearbox	Manual	Automatic	Auto
Acceleration, 0–100 km/h (sec)	7.6	7.6	9.2
Top speed, km/h	225	225	215
Fuel consumption l/100 km (Combined)	3.9/3.8*	4.2/4.2*	6.4
CO ₂ g/km	105/102*	113/111*	169

* Restricted offer

ENGINES	D5 (D5244T11)	D5 (D5244T15)
Type	In-line 5-cyl.turbo diesel	In-line 5-cyl.turbo diesel
Configuration	Transverse, front wheel drive	Transverse, front & all wheel drive
Displacement, cm ³	2400	2400
Bore (mm)	81.0	81.0
Stroke (mm)	93.15	93.15
Engine cylinder block material	Aluminium	Aluminium
Cylinderhead material	Aluminium	Aluminium
Compression ratio	16.5:1	16.5:1
Valves, no/cylinder	4	4
Camshafts	2	2
Engine management system	Electronically controlled common rail direct injection	Electronically controlled common rail direct injection
Ignition sequence	1 - 2 - 4 - 5 - 3	1 - 2 - 4 - 5 - 3
Engine idling speed, rpm	740	700
Fuel, rec. octane	Cetane Number: Min 48	Cetane Number: Min 48
Max output, kW (hp)/rpm	158 (215)/4000	158 (215)/4000
Max torque, Nm/rpm	420/1500–3250	440/1500–3000

POWER AND TORQUE →

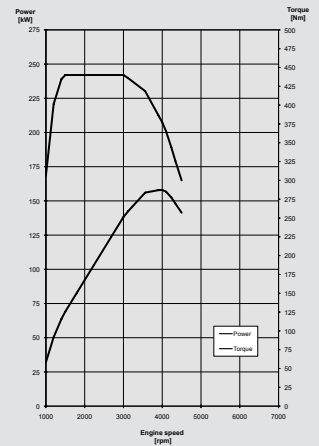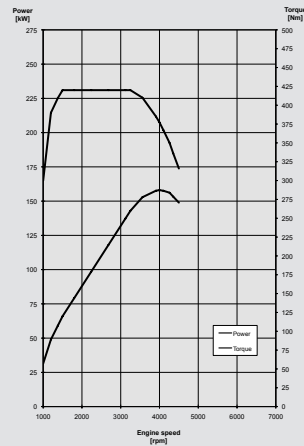

Manual gearbox/final drive	M66D F2A	3.770	
Automatic gearbox/final drive			AW TF-80 SC/3.200 (FWD)/3.329 (AWD)
PERFORMANCE			
Gearbox	Manual		Auto (FWD) Auto (AWD)
Acceleration, 0–100 km/h (sec)	7.5		7.7 7.7
Top speed, km/h	230		230 225
Fuel consumption l/100 km (Combined)	4.6		6.2 6.4
CO ₂ g/km	120		162 169

MEASUREMENTS AND VOLUMES

EXTERIOR MEASUREMENTS (CM)

Length	463.5
Width (without mirrors)	186.5
Height (including shark fin)	148.4
Wheelbase	277.6
Track, front, (16"/17")	158.8/157.8
Track, rear, (16"/17")	158.5/157.5
Ground clearance, curb	13.6

WEIGHTS/MISCELLANEOUS

Curb weight, kg (min-max, depending on setup)	1623-1822
Fuel tank, l (min-max, depending on equipment)	67.5
Max. trailer weight, kg	1300-1800
Max roof load, kg	75
Drag coefficient, Cd	0.29

INTERIOR MEASUREMENTS (CM)

Headroom without sunroof (front/rear)	97.3/95.4
Headroom with sunroof (front/rear)	95.5/95.4
Headroom maximum, without sunroof (front)	99.9
Passenger compartment width at shoulder height (front/rear)	144.7/140.2
Leg room (front/rear)	106.4/85.0
Cargo volume, including under floor storage (ISO V211)	430
Cargo length from the first seatback to the tailgate measured at:	
- the height of the floor covering	174.9
Cargo length from the second seatback to the tailgate measured at:	
- the height of the floor covering	97.8
Cargo height (rear wheel center and car center line)	74.2
Rear opening height (car center line)	65.8
Width of luggage compartment between wheelhouses	109.0

