
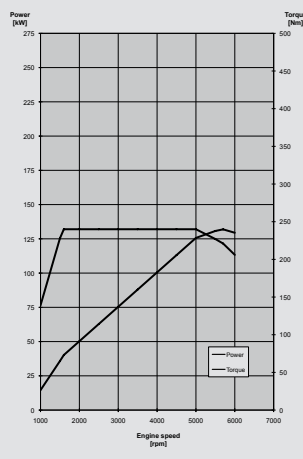


ENGINES	T4 (B4164T)	T4F (B4164T2)	T5 (B4204T11)
Type	In-line 4-cyl. turbo petrol	In-line 4-cyl. turbo petrol	In-line 4-cyl. turbo petrol
Configuration	Transverse, front wheel drive	Transverse, front wheel drive	Transverse, front wheel drive
Displacement, cm ³	1596	1596	1969
Bore (mm)	79.0	79.0	82.0
Stroke (mm)	81.4	81.4	93.2
Engine cylinder block material	Aluminium	Aluminium	Aluminium
Cylinderhead material	Aluminium	Aluminium	Aluminium
Compression ratio	10.0:1	10.0:1	10.8:1
Valves, no/cylinder	4	4	4
Camshafts	2	2	2
Engine management system	Integrated fuel (SFI)/ignition control systems	Integrated fuel (SFI)/ignition control systems	Integrated fuel (SFI)/ignition control systems
Ignition sequence	1 - 3 - 4 - 2	1 - 3 - 4 - 2	1 - 3 - 4 - 2
Engine idling speed, rpm	750	750	875 - 950
Fuel, rec. octane	91-98 RON	E85 & 91-98 RON	91-98 RON
Max output, kW (hp)/rpm	132 (180)/5700	132 (180)/5700	180 (245)/5500
Max torque, Nm/rpm	240/1600-5000	240/1600-5000	350/1500-4800

POWER AND TORQUE →

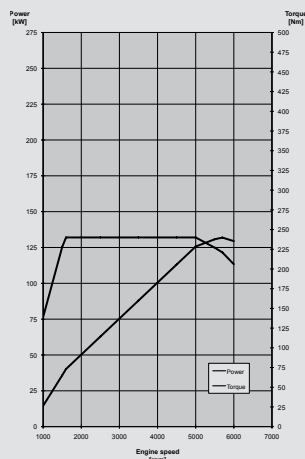

NOT AVAILABLE

Manual gearbox/final drive	MMT6 Z3	3.690/2.682	MMT6 Z3	3.690/2.682		
Automatic gearbox/final drive	MPS6-7	3.933/2.682	MPS6-7	3.933/2.682	AW TG-81SC	2.774
PERFORMANCE						
Gearbox	Manual	Automatic	Manual	Automatic		Automatic
Acceleration, 0-100 km/h (sec)	8.5	9.2	8.5	9.2		6.5
Top speed, km/h	220	220	220	220		230
Fuel consumption l/100 km (Combined)	6.6	7.1	6.9	7.1		6.2
CO ₂ g/km	152	165	159	165		144

TRANSMISSIONS

6-speed manual and automatic gearbox.

6-speed powershift.



8-speed automatic gearbox.

RATIO	AW TF-80 SC	AW TG-81SC	M66D F2A	M66F FD	MPS6-7	MPS6-4	MMT6 Z3	MMT6 W3
First	4.148	5.250	3.385	3.580	3.818	3.583	3.818	3.583
Second	2.370	3.029	1.905	2.050	2.150	1.952	2.150	1.952
Third	1.556	1.950	1.194	1.270	1.407	1.194	1.423	1.241
Fourth	1.155	1.457	0.838	0.840	1.029	0.842	1.029	0.868
Fifth	0.859	1.221	0.652	0.620	1.188	0.943	1.129	0.943
Sixth	0.686	1.000	0.540	0.510	0.971	0.789	0.943	0.789
Seventh		0.809						
Eighth		0.673						
Reverse	3.394	4.015	3.200	2.833	5.284	4.843	5.443	5.099

ENGINES

	3.2 AWD (B6324S5)	T6 AWD (B6304T4)
Type	In-line 6-cyl. petrol	In-line 6-cyl .turbo petrol
Configuration	Transverse, all wheel drive	Transverse, all wheel drive
Displacement, cm ³	3192	2953
Bore (mm)	84.0	82.0
Stroke (mm)	96.0	93.2
Engine cylinder block material	Aluminium	Aluminium
Cylinderhead material	Aluminium	Aluminium
Compression ratio	10.8:1	9.3:1
Valves, no/cylinder	4	4
Camshafts	2	2
Engine management system	Integrated fuel (SFI) ignition control systems	Integrated fuel (SFI)/ignition control systems
Ignition sequence	1 - 5 - 3 - 6 - 2 - 4	1 - 5 - 3 - 6 - 2 - 4
Engine idling speed, rpm	590	590
Fuel, rec. octane	91-98 RON	91-98 RON
Max output, kW (hp)/rpm	179 (243)/6400	224 (304)/5600
Max torque, Nm/rpm	320/3200	440/2100-4200

POWER AND TORQUE →

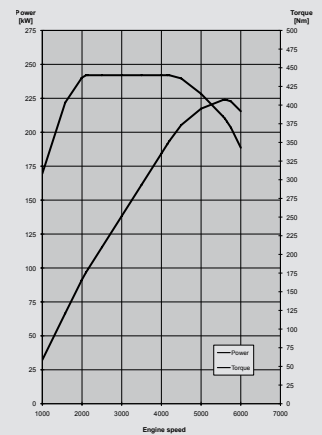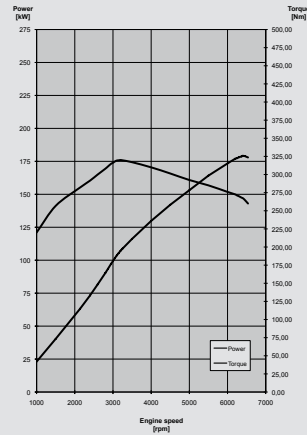



Manual gearbox/final drive			
Automatic gearbox/final drive	AW TF-80SC	3.464	AW TF-80SC 3.329
PERFORMANCE			
Gearbox		Automatic	Automatic
Acceleration, 0-100 km/h (sec)		8.2	6.4
Top speed, km/h		235	250
Fuel consumption l/100 km (Combined)		9.4	9.9
CO ₂ g/km		219	231

CHASSIS

Suspension	front	McPherson Strut, Coil Springs, Hydraulic Shock Absorbers, Stabilizer Bar
	rear	Independent Suspension with Coil Springs, Hydraulic Shock Absorbers, Stabilizer Bar
Steering		Power Assisted Rack and Pinion Steering
Turning circle, curb to curb, 225" width		11.2 m
Braking system		Antilock Braking System (ABS) with Electronic Brake Distribution (EBD) and Electronic Brake Assistance (EBA)
Braking distance, 100-0 km/h		38 m
Brake disc diameter	front	300 mm/316 mm
	rear	302 mm

ENGINES	D2 (D4162T)	D3 (D5204T7)	D4 (D4204T5)
Type	In-line 4-cyl.turbo diesel	In-line 5-cyl. turbo diesel	In-line 4-cyl. turbo diesel
Configuration	Transverse, front wheel drive	Transverse, front wheel drive	Transverse, front wheel drive
Displacement, cm ³	1560	1984	1969
Bore (mm)	75.0	81.0	82.0
Stroke (mm)	88.3	77.0	93.2
Engine cylinder block material	Aluminium	Aluminium	Aluminium
Cylinderhead material	Aluminium	Aluminium	Aluminium
Compression ratio	16.0:1	16.5:1	15.8:1
Valves, no/cylinder	2	4	4
Camshafts	1	2	2
Engine management system	Electronically controlled common rail direct injection	Electronically controlled common rail direct injection	Electronically controlled common rail direct injection
Ignition sequence	1 - 3 - 4 - 2	1 - 2 - 4 - 5 - 3	1 - 3 - 4 - 2
Engine idling speed, rpm	790	700	825
Fuel, rec. octane	Cetane Number: Min 48	Cetane Number: Min 48	Cetane Number: Min 48
Max output, kW (hp)/rpm	84 (115)/3600	100 (136)/3500	133 (181)/4250
Max torque, Nm/rpm	270/1750-2500	350/1500-2250	400/1750-2500

POWER AND TORQUE →

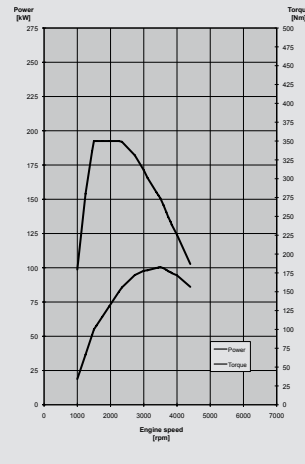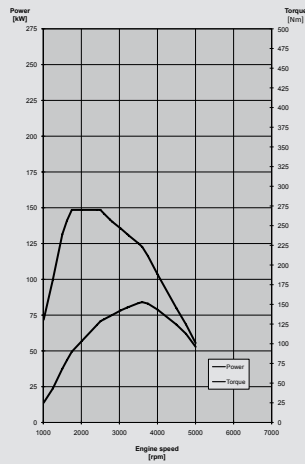

NOT AVAILABLE



Manual gearbox/final drive	MMT6 W3	4.063/2.955	M66D F2A	3.770	M66F FD	3.770
Automatic gearbox/final drive	MPS6-4	3.933/2.682	AW TF-80SC	3.075	AW TG-81SC	2.666
PERFORMANCE						
Gearbox	Manual	Automatic	Manual	Automatic (Tire restriction)	Manual	Automatic
Acceleration, 0-100 km/h (sec)	11.5	12.8	10.4	10.4	8.4	8.4
Top speed, km/h	190	185	205	200	225	225
Fuel consumption l/100 km (Combined)	4.5/4.1*	4.5/4.1*	4.3	5.0 (4.9)	3.9 (3.8*)	4.4 (4.3*)
CO ₂ g/km	119/107*	119/109*	114	132 (129)	105 (102*)	117 (114*)

* Restricted offer

* Restricted offer

ENGINES	D5 (D5244T11)	D5 (D5244T15)
Type	In-line 5-cyl. turbo diesel	In-line 5-cyl. turbo diesel
Configuration	Transverse, front wheel drive	Transverse, front and all wheel drive
Displacement, cm ³	2400	2400
Bore (mm)	81.0	81.0
Stroke (mm)	93.15	93.15
Engine cylinder block material	Aluminium	Aluminium
Cylinderhead material	Aluminium	Aluminium
Compression ratio	16.5:1	16.5:1
Valves, no/cylinder	4	4
Camshafts	2	2
Engine management system	Electronically controlled common rail direct injection	Electronically controlled common rail direct injection
Ignition sequence	1 - 2 - 4 - 5 - 3	1 - 2 - 4 - 5 - 3
Engine idling speed, rpm	740	700
Fuel, rec. octane	Cetane Number: Min 48	Cetane Number: Min 48
Max output, kW (hp)/rpm	158 (215)/4000	158 (215)/4000
Max torque, Nm/rpm	420/1500–3250	440/1500–3000

POWER AND TORQUE →

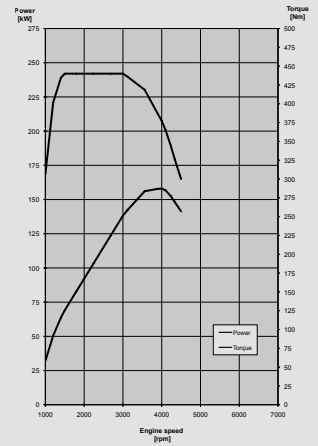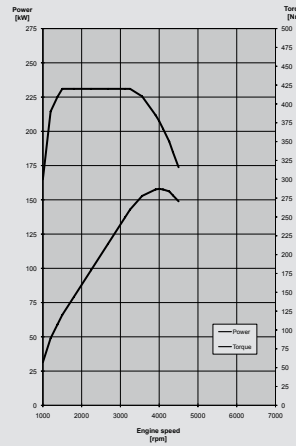

Manual gearbox/final drive	M66D F2A	3.770	
Automatic gearbox/final drive			AW TF-80SC FWD/AWD 3.200/3.329
PERFORMANCE			
Gearbox	Manual		Automatic FWD Automatic AWD
Acceleration, 0–100 km/h (sec)	7.6		7.8 7.8
Top speed, km/h	230		225 225
Fuel consumption l/100 km (Combined)	4.6		6.1 6.4
CO ₂ g/km	120		159 167

MEASUREMENTS AND VOLUMES

EXTERIOR MEASUREMENTS (CM)

Length	485.4
Width (without mirrors)	186.1
Height (including shark fin)	149.3
Wheelbase	283.5
Track, front, (16"/17")	158.8/157.8
Track, rear, (16"/17")	158.5/157.5
Ground clearance, curb Std / Low sport	15.1/13.0

WEIGHTS/MISCELLANEOUS

Curb weight, kg (min-max, depending on setup)	1629-1817
Fuel tank, l	70
Max. trailer weight, kg	1300-2000
Max roof load, kg	100
Drag coefficient, Cd	0.29

INTERIOR MEASUREMENTS (CM)

Headroom without sunroof (front/rear)	985/973
Headroom with sunroof (front/rear)	959/972
Passenger compartment width at shoulder height (front/rear)	145.7/143.1
Leg room (front/rear)	106.4/89.0
Cargo volume, including under floor storage (ISO V210)	480
Cargo length at floor from the back of front seatback	192.7
Cargo length at floor from the back of the rear seatback	109.4
Cargo floor height to ground	54.6
Rear opening height (car center line)	87.6
Width of luggage compartment between wheelhouses	113.0

