

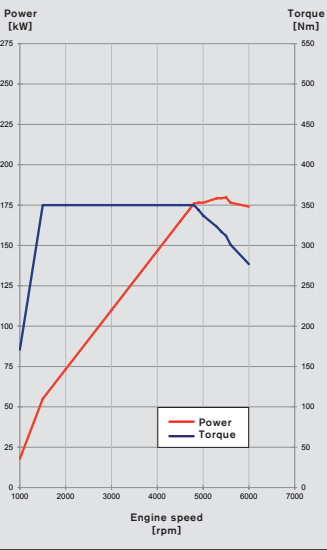
ENGINES

Type
Configuration
Displacement, cm³
Bore (mm)
Stroke (mm)
Engine cylinder block material
Cylinderhead material
Compression ratio
Valves, no/cylinder
Camshafts
Engine management system
Ignition sequence
Engine idling speed, rpm
Fuel, rec. octane
Max output, kW (hp)/rpm
Max torque, Nm/rpm

POWER AND TORQUE →

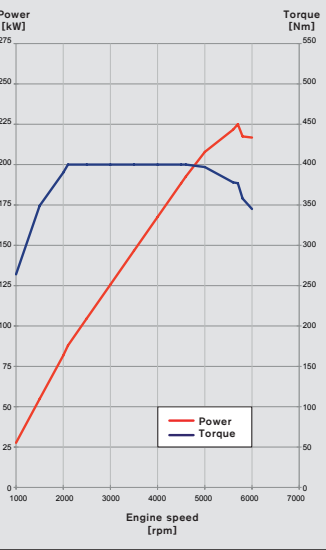
Manual gearbox/final drive
Automatic gearbox/final drive
PERFORMANCE
Gearbox
Acceleration, 0–100 km/h (sec)
Top speed, km/h
Fuel consumption l/100 km (Combined)
CO ₂ g/km

T5 & T5 AWD (B4204T11)
In-line 4-cyl. turbocharged
Transverse, front & all wheel drive
1969
82.0
93.2
Aluminium
Aluminium
10.8:1
4
2
Gasoline direct injection
1 - 3 - 4 - 2
850±100
95–98 RON
180 (245)/5500
350/1500–4800



–	–
AW TG-81SC	3.329 / 3.329
Automatic (FWD)	Automatic (AWD)
7.2	7.2
210	210
6.7	7.5
157	175

T6 & T6 AWD (B4204T9)
In-line 4-cyl. supercharged and turbocharged
Transverse, front & all wheel drive
1969
82.0
93.2
Aluminium
Aluminium
10.3:1
4
2
Gasoline direct injection
1 - 3 - 4 - 2
850±100
95–98 RON
225 (306)/5700
400/2100–4800



–	–
AW TG-81SC	3.329 / 3.329
Automatic (FWD)	Automatic (AWD)
6.9	6.9
210	210
7.0	7.7
163	179

TRANSMISSIONS

- 6-speed manual gearbox
- 6-speed automatic gearbox
- 8-speed automatic gearbox

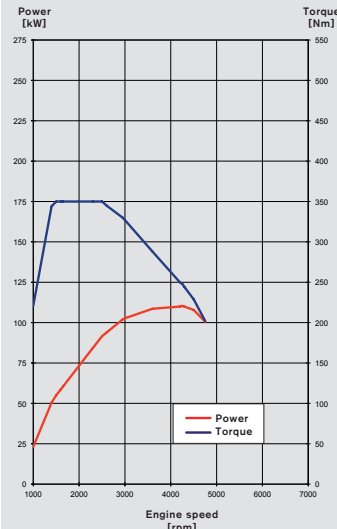
RATIO	M66F	M66K	AW TF-80SD	AW TG-81SC
First	3.583	3.583	4.148	5.250
Second	2.050	1.905	2.370	3.029
Third	1.267	1.194	1.556	1.950
Fourth	0.838	0.838	1.155	1.457
Fifth	0.617	0.652	0.859	1.221
Sixth	0.510	0.540	0.686	1.000
Seventh	–	–	–	0.809
Eighth	–	–	–	0.673
Reverse	2.833	2.750	3.394	4.015

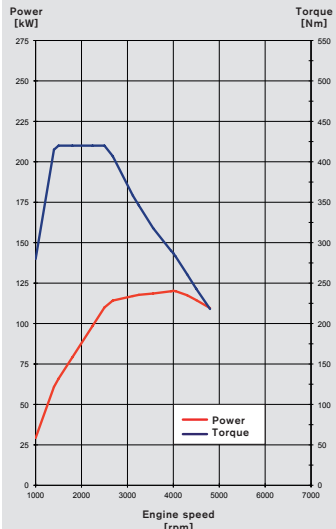
ENGINES

Type
Configuration
Displacement, cm³
Bore (mm)
Stroke (mm)
Engine cylinder block material
Cylinderhead material
Compression ratio
Valves, no/cylinder
Camshafts
Engine management system
Ignition sequence
Engine idling speed, rpm
Fuel
Max output, kW (hp)/rpm
Max torque, Nm/rpm

POWER AND TORQUE →

Manual gearbox/final drive
Automatic gearbox/final drive
PERFORMANCE
Gearbox
Acceleration, 0–100 km/h (sec)
Top speed, km/h
Fuel consumption l/100 km (Combined)
CO ₂ g/km

D3 (D4204T4)	
In-line 4-cyl. turbo diesel	
Transverse, front wheel drive	
1969	
82.0	
93.2	
Aluminium	
Aluminium	
15.8:1	
4	
2	
Electronically controlled common rail direct injection	
1 - 3 - 4 - 2	
825±150	
Diesel*	
110 (150)/4250	
350/1500–2500	
	
M66F	4.533
AW TG-81SC	3.075
Manual	Automatic
10.0	10.0
190	190
4.5	4.7
117	124
*According to EN590 Maximum biodiesel (FAME) content 7%	

D4 AWD (D5244T17)	
In-line 5-cyl. twin turbo diesel	
Transverse, all wheel drive	
2400	
81.0	
93.2	
Aluminium	
Aluminium	
16.5:1	
4	
2	
Electronically controlled common rail direct injection	
1 - 2 - 4 - 5 - 3	
740±25	
Diesel*	
120 (163)/4000	
420/1500–2500	
	
M66K	4.533
AW TF-80SD	3.604
Manual	Automatic
10.5	10.8
195	190
5.2	5.7
137	149
*According to EN590 Maximum biodiesel (FAME) content 7%	

CHASSIS

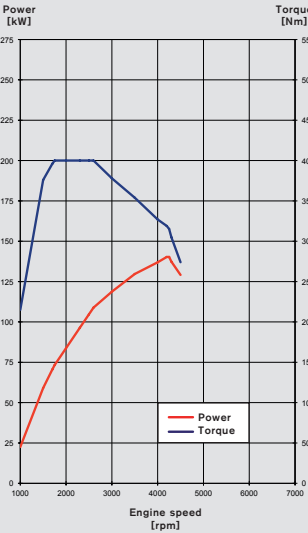
Suspension	front	McPherson Strut, Coil Springs, Hydraulic Shock Absorbers, Stabilizer Bar
	rear	Independent Suspension with Coil Springs, Hydraulic Shock Absorbers, Stabilizer Bar
Steering	Power Assisted Rack and Pinion Steering	
Turning circle, (curb to curb)	11.7 m/12.2 m (235/255)	
Braking system	Antilock Braking System (ABS) with Electronic Brake Distribution (EBD) and Brake Assistance (BA)	
Braking distance, 100–0 km/h	39 m	
Brake disc diameter	front	328 mm
	rear	302 mm

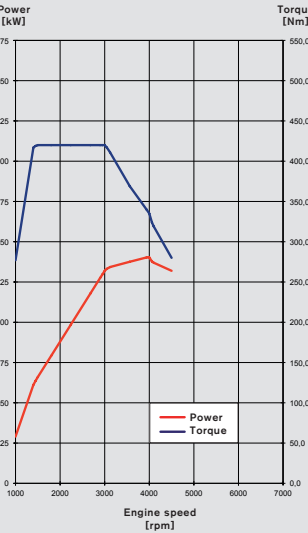
ENGINES

Type
Configuration
Displacement, cm³
Bore (mm)
Stroke (mm)
Engine cylinder block material
Cylinderhead material
Compression ratio
Valves, no/cylinder
Camshafts
Engine management system
Ignition sequence
Engine idling speed, rpm
Fuel
Max output, kW (hp)/rpm
Max torque, Nm/rpm

POWER AND TORQUE →

Manual gearbox/final drive
Automatic gearbox/final drive
PERFORMANCE
Gearbox
Acceleration, 0–100 km/h (sec)
Top speed, km/h
Fuel consumption l/100 km (combined)
CO ₂ g/km

D4 (D4204T14)	
In-line 4-cyl. twin turbo diesel	
Transverse, front wheel drive	
1969	
82.0	
93.2	
Aluminium	
Aluminium	
15.8:1	
4	
2	
Electronically controlled common rail direct injection	
1 - 3 - 4 - 2	
825±150	
Diesel*	
140 (190)/4250	
400/1750–2500	
	
M66F	4.533
AW TG-81SC	3.075
Manual	Automatic
8.1	8.1
210	210
4.5	4.7
117	124
*According to EN590 Maximum biodiesel (FAME) content 7%	

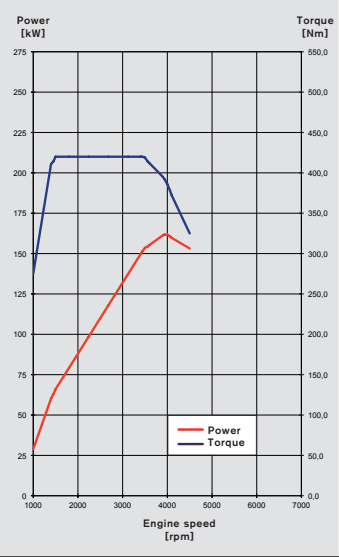
D4 AWD (D5244T21)	
In-line 5-cyl. twin turbo diesel	
Transverse, all wheel drive	
2400	
81.0	
93.2	
Aluminium	
Aluminium	
16.5:1	
4	
2	
Electronically controlled common rail direct injection	
1 - 2 - 4 - 5 - 3	
740±25	
Diesel*	
140 (190)/4000	
420/1500–3000** 440/1500–2750***	
	
M66K	4.533
AW TF-80SD	3.604
Manual	Automatic
9.6	9.7
205	200
5.2	5.7
137	149
*According to EN590 Maximum biodiesel (FAME) content 7%	
** Manual gearbox/** Automatic gearbox	

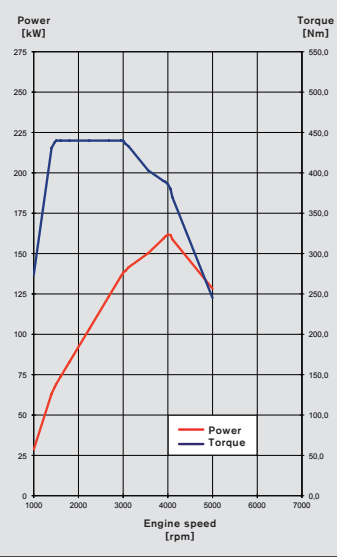
ENGINES

Type
Configuration
Displacement, cm³
Bore (mm)
Stroke (mm)
Engine cylinder block material
Cylinderhead material
Compression ratio
Valves, no/cylinder
Camshafts
Engine management system
Ignition sequence
Engine idling speed, rpm
Fuel
Max output, kW (hp)/rpm
Max torque, Nm/rpm

POWER AND TORQUE →

Manual gearbox/final drive
Automatic gearbox/final drive
PERFORMANCE
Gearbox
Acceleration, 0–100 km/h (sec)
Top speed, km/h
Fuel consumption l/100 km (combined)
CO ₂ g/km

D5 AWD (D5244T22)	
In-line 5-cyl. twin turbo diesel	
Transverse, all wheel drive	
2400	
81.0	
93.2	
Aluminium	
Aluminium	
16.5:1	
4	
2	
Electronically controlled common rail direct injection	
1 - 2 - 4 - 5 - 3	
740±25	
Diesel*	
162 (220)/4000	
420/1500–3500	
	
M66K	4.533
-	
Manual	
8.1	
210	
5.2	
137	
*According to EN590 Maximum biodiesel (FAME) content 7%	

D5 AWD (D5244T20)	
In-line 5-cyl. twin turbo diesel	
Transverse, all wheel drive	
2400	
81.0	
93.2	
Aluminium	
Aluminium	
16.5:1	
4	
2	
Electronically controlled common rail direct injection	
1 - 2 - 4 - 5 - 3	
740±25	
Diesel*	
162 (220)/4000	
440/1500–3000	
	
-	
AW TF-80SD	3.604
Automatic	
8.2	
210	
5.7	
149	
*According to EN590 Maximum biodiesel (FAME) content 7%	

MEASUREMENTS AND VOLUMES

EXTERIOR MEASUREMENTS (CM)	
Length	464.4
Width (mirrors folded)	189.1
Width (incl mirrors, outer edge)	212.0
Height (including shark fin antenna)	171.3
Wheelbase	277.4
Track, front	163.2
Track, rear, (tire (width): (235)	158.6
Ground clearance	23.0

WEIGHTS/MISCELLANEOUS	
Weight, kg (min-max, depending on setup)	1834-1921
Fuel tank, l	70
Max. trailer weight, kg	1600-2000
Max roof load, kg	100
Drag coefficient, Cd	0.35

INTERIOR MEASUREMENTS (CM)	
Headroom without panorama roof (front/rear) (H61-1/H61-2)	99.2/100.3
Headroom with panorama roof (front/rear) (H61-1 SR/H61-2 SR)	96.9/96.9
Headroom maximum, without sunroof (front) (H62-1)	102.5
Passenger compartment width at shoulder height (front/rear) (W3-1/W3-2)	143.9/140.3
Leg room (front/rear) (L34/L51-2)	104.7/92.4
Cargo vaolume, including under floor storage (ISO V211) (litres)	495
Cargo length from the first seatback to the tailgate measured at: – the height of the floor covering (L202-1)	178.9
Cargo length from the second seatback to the tailgate measured at: – the height of the floor covering (L202-2)	97.2
Cargo height (rear wheel center and car center line) (H201)	80.2
Rear opening height (car center line) (H202)	80.2
Width of luggage compartment between wheelhouses (W201)	113.0

