

NH15™

ESCAPE HOOD




ESCAPE HOOD

AVON
PROTECTION



NH15™ ESCAPE HOOD

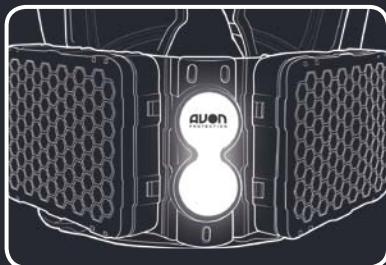


SEE AND BE SEEN IN EVERY SITUATION

In emergency situations of heavy smoke, poor lighting and visibility conditions, the NH15 provides a clear range of vision. The reflective label on the hood allows users to be easily seen by rescue teams with emergency lighting.



COMPACT FOR QUICK ACCESS AND USE

Other escape hoods are bulky and cumbersome. The Avon NH15 features low-profile filters for reduced snagging, and reduced delay in donning. The streamlined design minimises the potential for grabbing when used in confined areas with anxious people.

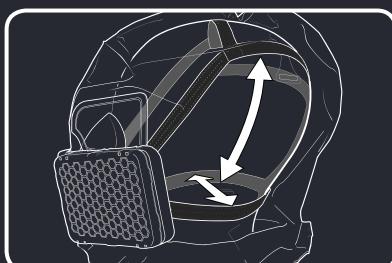

FIT AND COMFORT

The close fit filters combined with a self adjusting harness provide the user with increased comfort and the security of a correctly fitted hood.

WE REDUCED THE SIZE. NOT THE PROTECTION.



*The image above represents the NIOSH Standard Carrier



DON IN LESS THAN 30 SECONDS

Achieve critical CBRN respiratory protection within 30 seconds of opening the protective packaging and donning the reflective hood.



15 MINUTES OF PROTECTION

Provides wearers with respiratory, vision and facial CBRN protection for a minimum 15 minutes to allow sufficient time to evacuate from a contaminated area.



5 YEAR SHELF LIFE

With minimal packaging, no maintenance, and low cost of ownership, the NH15 can provide 5 years of maintenance-free protection.

COMPETITIVE COMPARISONS

	AVON NH15	MSA Safe Escape	ILC Dover Scape	North ER2000	QuickPro
Packaged size	3.4" x 4.0" x 6.0"	6.7" x 5.5" x 12.2"	3.5" x 10.2" x 8.3"	4.5" x 5.9" x 10"	3.75" x 4.75" 7.75"
Weight	625g (23 oz)	1029g (36.3 oz)	1016g (35.8 oz)	803g (28 oz)	635g (23.5oz)
NIOSH certified	TC-14G-0302	TC-14G-0276	TC-14G-0277	TC-14G-0281	No
Approved for CE Marking	BS8468-3.2:2009 type-1	No	No	No	No
Clear hood for user identification & all round vision	Full	Partial	Partial	Partial	No
Self adjusting harness	Yes	Yes	No Harness	No	No
Anti-fog coating on visor	Yes	No	No	Yes	Yes
User noise	Low	High	"Very High (Motor/Fan Noise)"	High	High
Filter protrusion distance from face	2"	7"	3"	5"	5"
Balanced on user's head	Yes	No	No	Yes	No
Batteries	No	No	Yes	No	No

USER TRAINING



The Avon NH15 contains a quick-don label to guide user in an emergency situation.



To support the introduction of the NH15 into an organisation, simple posters provide a constant message to users on the correct operation.



A training hood is available for end-user training. Can be used for multiple training courses.



CD and Training Presentation available for initial user training and new user education on the "do's and don'ts" of using the Avon NH15.

AFFORDABLE PROTECTION

- NO annual fit test requirements
- The Avon NH15 is vacuum-packed in a multilayer barrier bag that provides 5 years of shelf life
- NO maintenance or inspection requirements
- Protect more people with your budget

IDEAL FOR:

- Oil Refineries
- Chemical Facilities
- General Industrial Applications
- Industries
- Mining/Drilling Applications
- Executive Protection
- Truck/Transportation



Industry Certified Protection Factors
NATO standard protection factors ensure the hood has been rigorously tested.
NIOSH CBRN approved TC-146-0302.



The NH15 CBRN 15 minute escape hood carries an Article 10 type-examination approval to BS8468-3.2:2009 type-1, under the PPE Directive 89/686/EEC for CE marking

TECHNICAL DATA

PROTECTION FACTOR & HOOD PERFORMANCE		TYPICAL FILTER PERFORMANCE DATA	
Breathing zone (Oronasal)	Greater than 2000		
Hood zone (Ocular)	Greater than 150		
Neck size range	330-500mm (regular)		
Donning time	Less than 30s		
Re-breathing CO ₂	Less than 2.0%		
BREATHING RESISTANCE		BARRIER PERFORMANCE (SWATCH SAMPLES)	
Inhalation at 85lpm	Less than 50mm H ₂ O	GB	Greater than 30 minutes
Exhalation at 85lpm	Less than 10mm H ₂ O	HD	Greater than 30 minutes
SMARTMAN PERFORMANCE (TESTED AT ECBC)		PACKAGING	
GB	Greater than 30 minutes	Pack size	6"x4"x3.4" in (150 x 100 x 90mm)
HD	Greater than 30 minutes	Packaging type	4 layer foil barrier bag surrounded by reinforced nylon carrier
SIZING	NIOSH APPROVAL	CE MARKING APPROVAL	NECK SIZE
Extra Small (Hard to fit)	75027-104-A	600191-P	12 to 13 Inches
Regular	75027-100-A	600192-P	13 to 18 Inches
Large	75027-107-A	600193-P	18 to 22 Inches
Training hoods are available on request.			
FILTER PERFORMANCE		FLAME RESISTANCE	
Particulate penetration	P3/P100 (Less than 0.03%)	Meets requirements when tested in accordance with EN13274-4 ; 2001 method 3.	

The Americas

t: +1 888 286 6440
e: customerservice@avon-protection.com

Europe, Middle East, Asia, Africa & Australasia

t: +44 (0) 1225 896705
e: protection@avon-protection.com

GR12862 - EMEA/NH15 CE/BR/UK/140515

ADVANCE WITH CONFIDENCE
www.avon-protection.com

